

TRAILER TILTER

TRAILER TILTER

Universal Utility Trailer Tilter

Never worry about loading your vehicle on your trailer again! Introducing the Trailer Tilter!


Installs easily in any standard 2" receiver hitch. Manual hand crank lifts the ball coupler up to 15" above towing position.

Safety pin locks unit in towing position.

Rated at 10,000 lbs Gross Vehicle Weight,
2,000 lbs Tongue Weight

United States Patent No. 7,370,844

CAUTION Do NOT tow with jack in raised position.

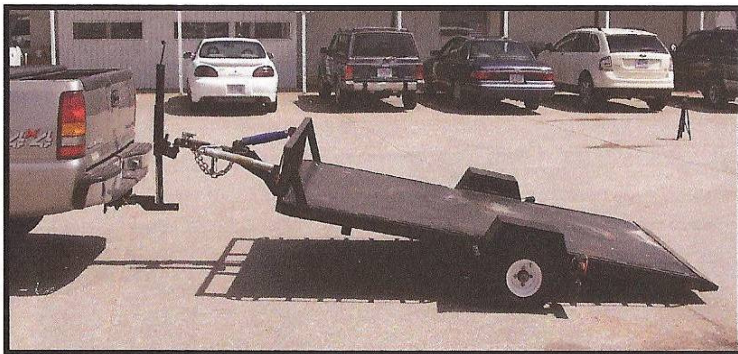

The length of the trailer determines the angle of the trailer bed once the Trailer Tilter has been raised 15".
12 foot trailer - 6° angle • 16 foot trailer - 4.5° angle
18 foot trailer - 4° angle • 20 foot trailer - 3.5° angle


Distributed by:



www.convert-a-ball.net • info@convert-a-ball.net
800-543-1732 • 308-254-7115 • FAX 308-254-7194
PO Box 199, Sidney, NE 69162
955 Ball Street, Sidney, NE 69162



Interchange Ball System allows for towing with 2-5/16", 2" and 1-7/8" ball.

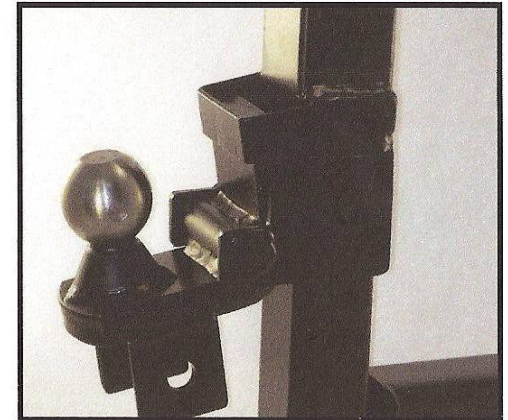

Floated head ball mount adjusts as the angle of the trailer increases, reducing stress on the coupler and ensuring a safe connection.

